

# INSTRUCTIONS

## \*Specifications:

<b>Image Sensor:</b>	Sony 1/3" Super HAD CCD
<b>Picture Elements:</b>	NTSC: 510x492
<b>Resolution:</b>	420 lines
<b>S/N Ratio:</b>	More than 46 dB
<b>Min Illumination:</b>	0.1 LUX
<b>Electronic Shutter:</b>	1/60s - 1/100,000s
<b>Iris Control:</b>	Automatic
<b>White Balance:</b>	Automatic
<b>Gamma Characteristic:</b>	0.45
<b>Lens:</b>	Varifocal, 4-9mm
<b>Sync. System:</b>	Internal
<b>Power Requirements:</b>	12VDC
<b>Power Consumption:</b>	120mA
<b>Video Output:</b>	1 Vp-p @ 75 ohms
<b>Humidity:</b>	RH 95% max.
<b>Dimensions:</b>	2.75" x 3.30" x 7.50" (70mm x 84mm x 190mm)
<b>Operating Temp:</b>	-10°C to 50°C (14°F to 122°F)


\*Specifications subject to change without notice.

## CHANNEL VISION Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for two years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.

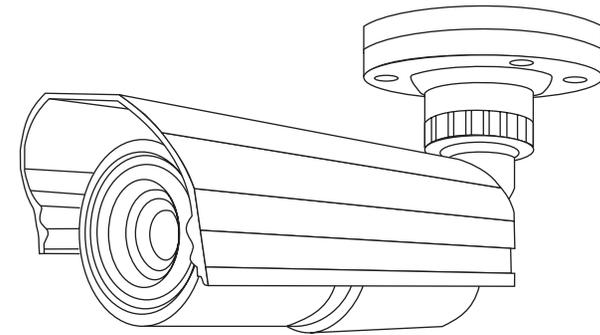

## 6010 Varifocal Bullet Camera

 CHANNEL VISION™


©2008 CHANNEL VISION TECHNOLOGY

The **6010** is a Varifocal Bullet Camera. Its 4-9mm varifocal lens and low light sensitivity make it ideal for CCTV installations with minimal ambient light where precise camera adjustments are needed. Typical applications include entry gates, driveways, patios, and backyards.


**Features:**

- Sony 1/3" Super HAD CCD sensor
- 420 TV lines of resolution
- 4-9mm varifocal lens
- Works with 5040 illuminator for night viewing
- Easy to install

**6010 Varifocal Bullet Camera Includes**

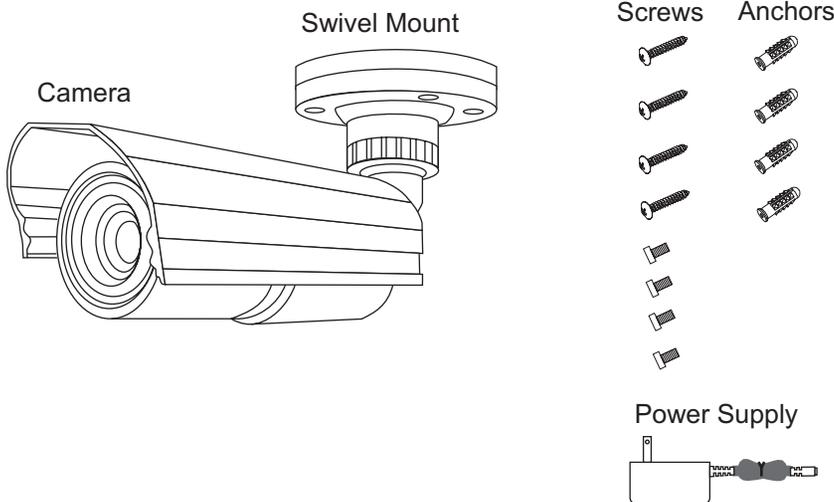

**Model 6010**

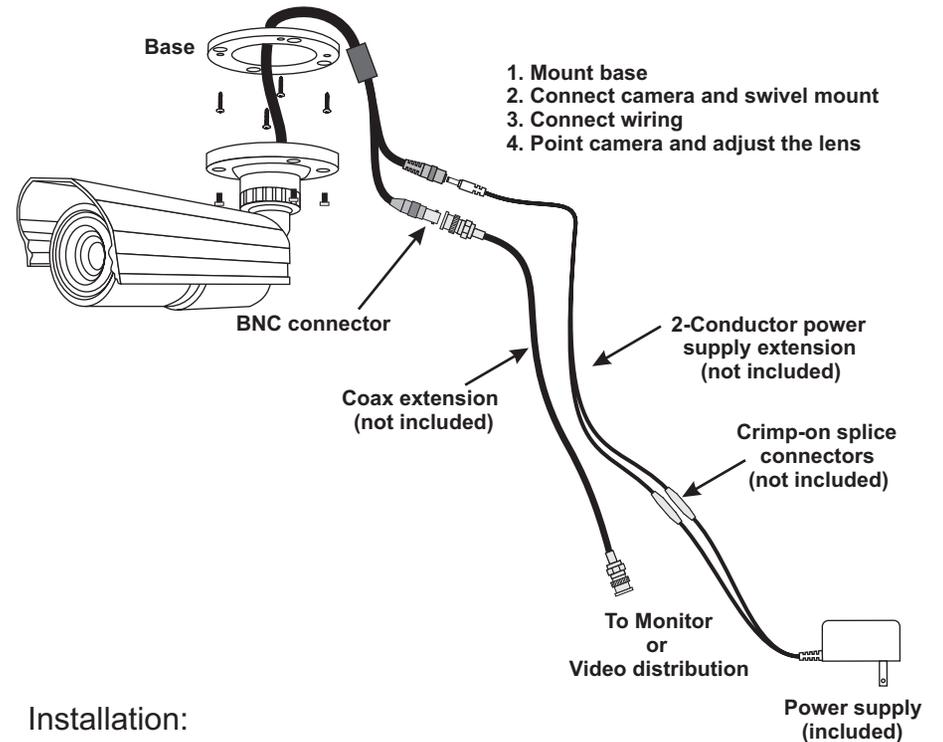

**Installation:**

- Drill a hole for wiring to exit the wall or ceiling.
- Attach the base of the swivel mount using the screws provided.
- If necessary, attach the camera's video output to a coax extension that is long enough to reach your monitor or video distribution equipment.
- If necessary, cut the connector off of the end of the power supply and splice in an extension using crimp-on connectors.
- Mount the base to the ceiling.
- Screw the swivel mount into the base (see diagram).
- Point the camera body and adjust the lens view.