


INSTRUCTIONS

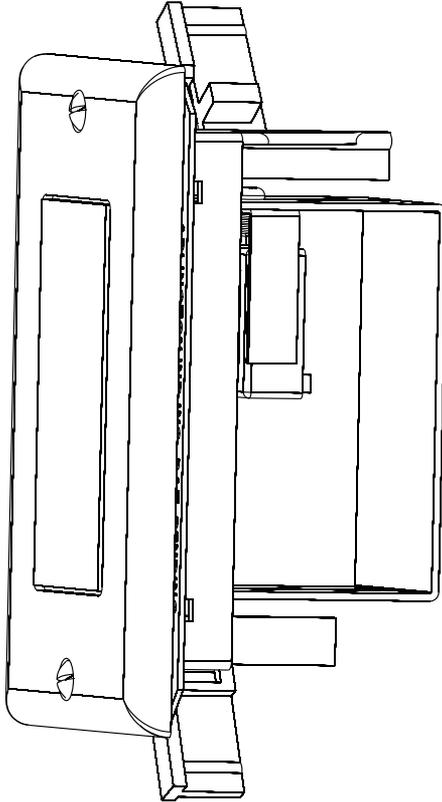

6200-xxx


Flush Mount Single Gang Box Color Camera

Model 6200-xxx


The **6200** series color flush mount single gang box cameras are the perfect solution for surveillance applications where discreet style is required. Finished with a smoked acrylic facing and choice of seven different decorative colors, the box blends easily into any installation background. The compact camera is housed behind the acrylic facing and features a 1/3" Sony Super HAD CCTV sensor, 550 lines of resolution and a 5.5mm lens for tight viewing angles. The 6200-Series is weather resistant and suitable for either indoor or outdoor use.

Features:

- High quality 1/3" SONY Super HAD CCD sensor
- 550 TV lines of resolution
- 5.5mm lens for tight viewing angles
- Easy to install in a single gang box
- Decorative Colors Available
White (212), Polished Brass (222), Antique Brass (232), Chrome (242), Oil Rubbed Bronze (252), Black (282), Satin Nickel (302)

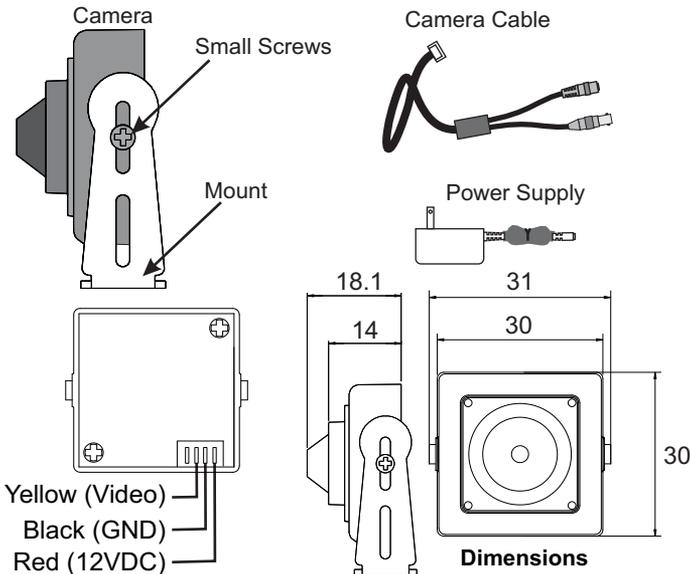


Model 6200-xxx

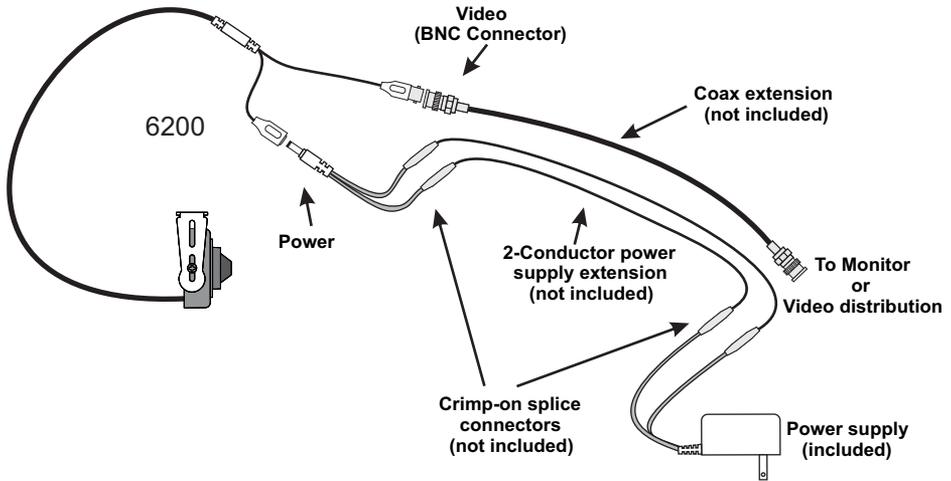

Installation:

- Attach the camera mount to the bracket supplied with this product
- Apply double sided gasket between plexiglass and outer plate
- If necessary, attach the camera's video output to a coax extension that is long enough to reach your monitor or video distribution equipment.
- If necessary, cut the connector off of the end of the power supply and splice in an extension using crimp-on connectors.

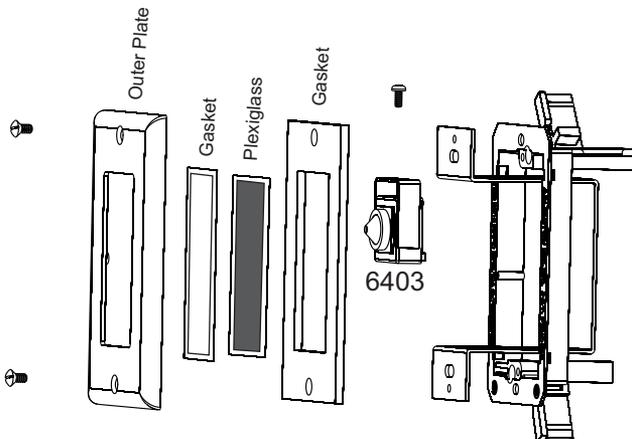

CHANNEL VISION™

***Specifications:**

Image Sensor:	1/3" SONY Super HAD CCD
Picture Elements:	NTSC: 768x494
Resolution:	550 lines
S/N Ratio:	More than 48 dB
Min Illumination:	0.2 LUX @ F2.0
Electronic Shutter:	1/60s - 1/100,000s
Iris Control:	Automatic
White Balance:	Automatic
Gamma Characteristic:	0.45
Lens Focal Length:	5.5mm
Sync. System:	Internal
Power Requirements:	12VDC
Power Consumption:	65mA
Video Output:	1 Vp-p @ 75 ohms
Dimensions:	1.18" x 1.18" x 0.55" (30 x 30 x 18mm), camera only
Operating Temp:	-10°C to 50°C (14°F to 122°F) *Specifications subject to change without notice.

1 Year Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for one year from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free.

A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.

Channel Vision products are not intended for use in medical, lifesaving, life sustaining or critical environment applications. Channel Vision customers using or selling Channel Vision products for use in such applications do so at their own risk and agree to fully indemnify Channel Vision for any damages resulting from such improper use or sale.

 CHANNEL VISION™
www.channelvision.com

234 Fischer Avenue, Costa Mesa, California 92626 USA
(714)424-6500 • (800)840-0288 • (714)424-6510 fax
email: techsupport@channelvision.com