

INSTRUCTIONS

*Specifications:

| | |
|---------------------------------------|--|
| Image Sensor: | 1/3" Hi-Res CCD |
| Picture Elements: | NTSC: 768x494 |
| Resolution: | 540 lines |
| S/N Ratio: | More than 48 dB |
| Min Illumination: | 0.02 LUX @ F1.2 (Day), 0 Lux @ F2.0 (Night) |
| Electronic Shutter: | 1/60s - 1/100,000s |
| Iris Control: | Automatic |
| White Balance: | Automatic |
| Gamma Characteristic: | 0.45 |
| Focal Length & App. Ratio: | 6mm, F2.0 |
| Angle Field of View: | Horizontal: 43.6° x Vertical: 33.4° |
| Sync. System: | Internal |
| Power Requirements: | 12VDC |
| Power Consumption: | 85mA (IR off), 650mA (IR on) |
| Infrared Illumination: | 36 IR LEDs |
| LED Wavelength: | 850nm |
| Illumination Distance: | 99 feet (30 meters) |
| Video Output: | 1 Vp-p @ 75 ohms |
| Waterproof Rating: | IP68 |
| Dimensions: | 2.75" x 4.75" (70mm x 120mm), camera body only |
| Operating Temp: | -10°C to 50°C (14°F to 122°F) |

*Specifications subject to change without notice.

CHANNEL VISION Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for two years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.



6330 Hi-Resolution IR Bullet Camera

CHANNEL VISION™

©2010 CHANNEL VISION TECHNOLOGY


Model 6330

The **6330** is a high-resolution Infra Red illuminated bullet camera. Its waterproof design and LED illumination make it ideal for CCTV installations where there is no ambient light and no shelter for the camera. Typical applications include entry gates, driveways, patios, and backyards.

Features:


- High quality 1/3" Hi-Res CCD sensor
- 540 TV lines of resolution
- Viewing distance of 99 feet (30 meters) in total darkness
- Built-in 36 LED illuminator
- Built-in light sensor turns off LEDs during the day
- Waterproof and suitable for outdoor use
- Easy to install

6330 IR Bullet Camera Includes

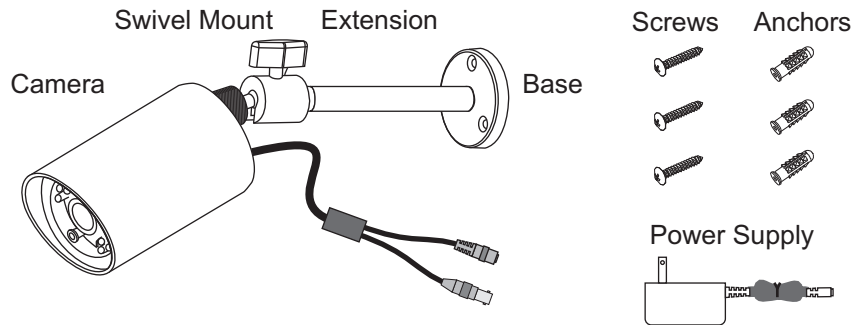

Warnings:

- Do not look directly into the illuminated camera when in use.
- Do not touch the body of the unit when in use. It can reach temperatures as high as 150°F.
- Do not point the LED illuminated camera directly at paper or flammable materials.
- Avoid touching the lens with fingers. Clean off any finger prints with cleaning alcohol and cotton swabs.

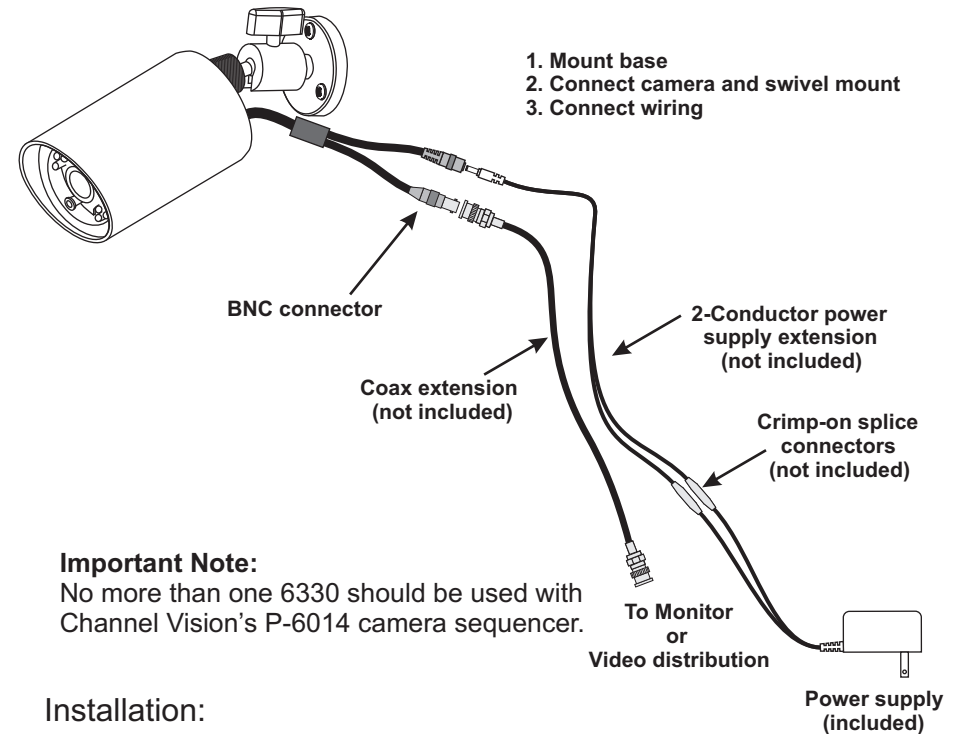

Important Note:

No more than one 6330 should be used with Channel Vision's P-6014 camera sequencer.

Installation:

- Drill a hole for wiring to exit the wall or ceiling.
- Attach the base of the swivel mount using the screws provided. If mounting to a j-box use the 5032 mounting plate (sold separately).
- If necessary, attach the camera's video output to a coax extension that is long enough to reach your monitor or video distribution equipment.
- If necessary, cut the connector off of the end of the power supply and splice in an extension using crimp-on connectors.
- Screw the swivel mount into the base and attach the camera (see diagram).
- Move the camera body to adjust the view.