


Installation

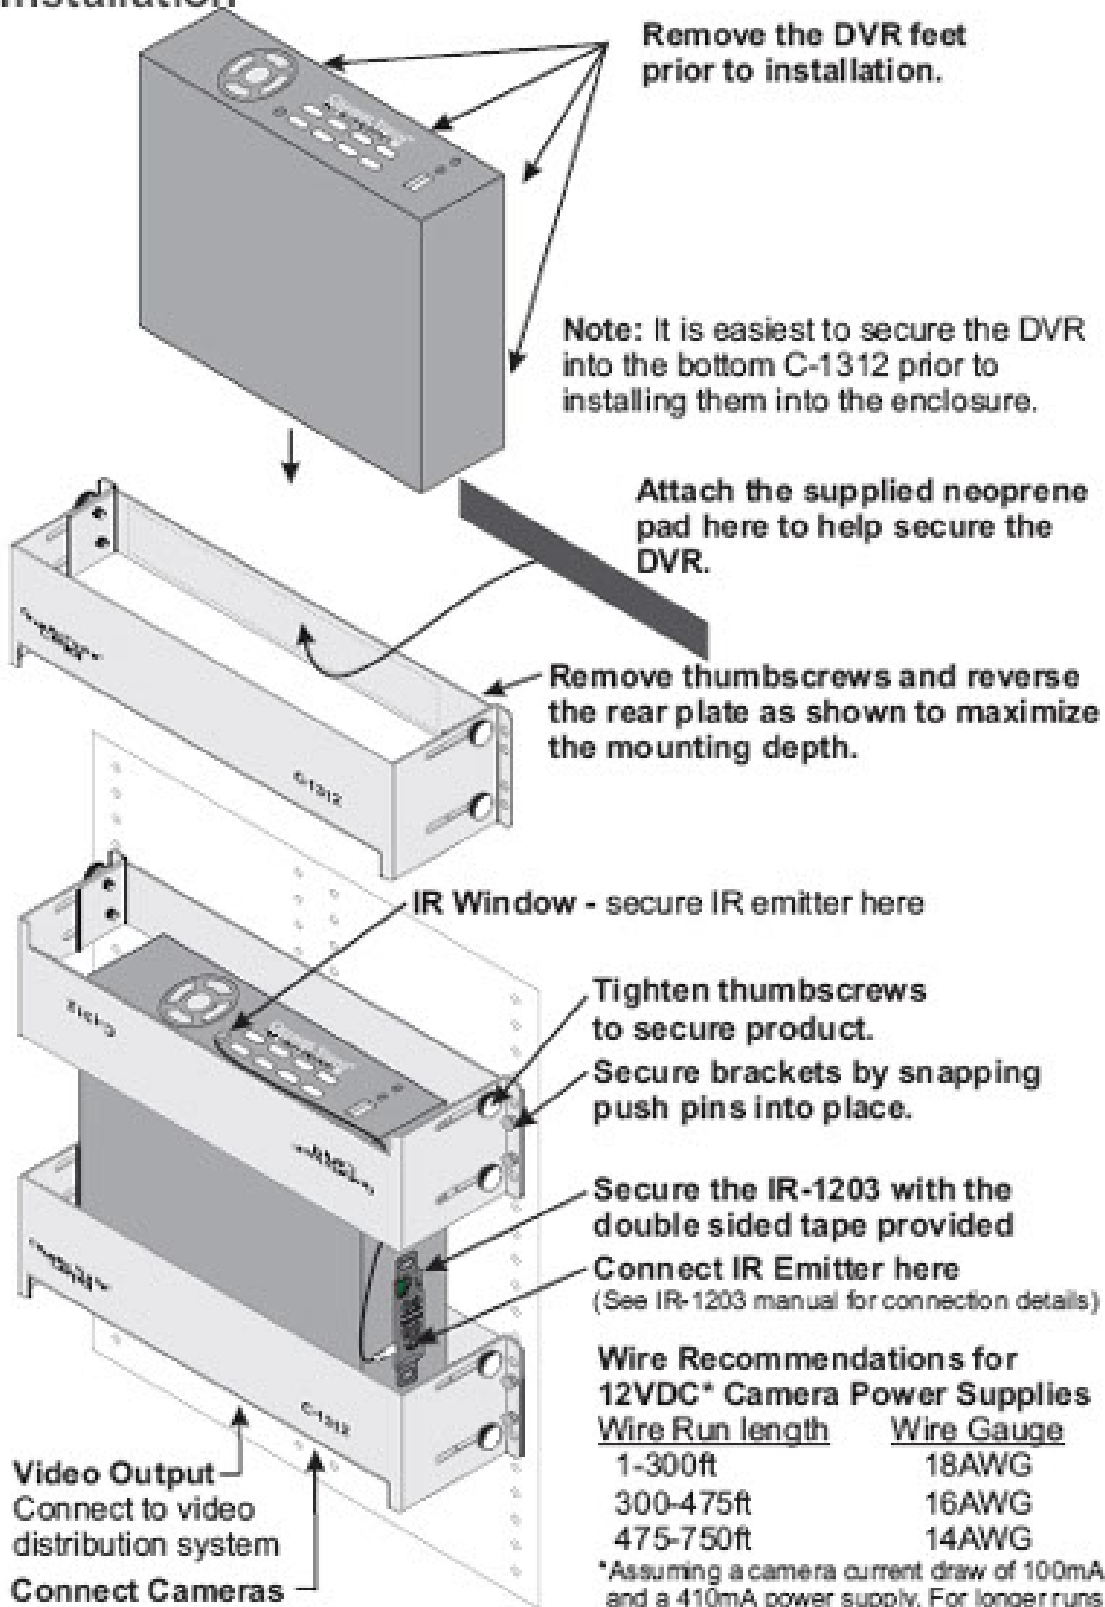

Remove the DVR feet prior to installation.

Note: It is easiest to secure the DVR into the bottom C-1312 prior to installing them into the enclosure.

Attach the supplied neoprene pad here to help secure the DVR.

Remove thumbscrews and reverse the rear plate as shown to maximize the mounting depth.

IR Window - secure IR emitter here

Tighten thumbscrews to secure product.

Secure brackets by snapping push pins into place.

Secure the IR-1203 with the double sided tape provided

Connect IR Emitter here (See IR-1203 manual for connection details)

Wire Recommendations for 12VDC* Camera Power Supplies

Wire Run length	Wire Gauge
1-300ft	18AWG
300-475ft	16AWG
475-750ft	14AWG

*Assuming a camera current draw of 100mA and a 410mA power supply. For longer runs use a higher current power supply.

Video Output
Connect to video distribution system

Connect Cameras
Use RG59 for video and 18/2 for power
If only CAT5 cable is available, use Channel Vision Baluns: B-201, B-300 or B-321