



# 9 and 18 Camera Power Supply

## 5011 / 5012

Channel Vision's 5011 and 5012 Multi-Camera Power Supplies are specially designed to power 9 (5011) or 18 (5012) surveillance cameras from one central location. Each of the camera outputs are fuse protected and feature LED indicators. These multi-camera power supplies are housed in a steel cabinet with knockouts included for ease of installation and cable management. The UL approved 5011 and 5012 power supplies include separate isolated transformers with surge protection to power each camera at 120- 240VAC.

### Features

- 9 and 18 channel fuse protected outputs
- Fuse protected power input
- UL approved (E3086063JCK)
- Supports 120-240vAC input voltage
- LED indicator for each output

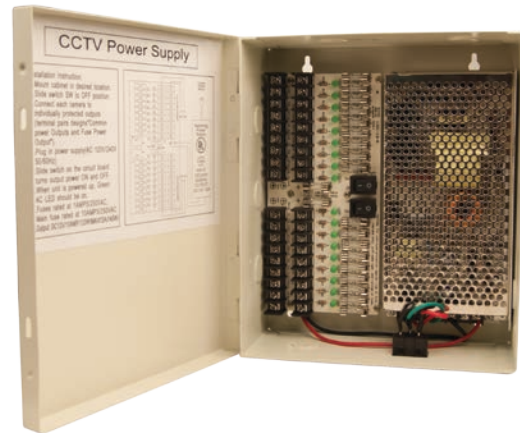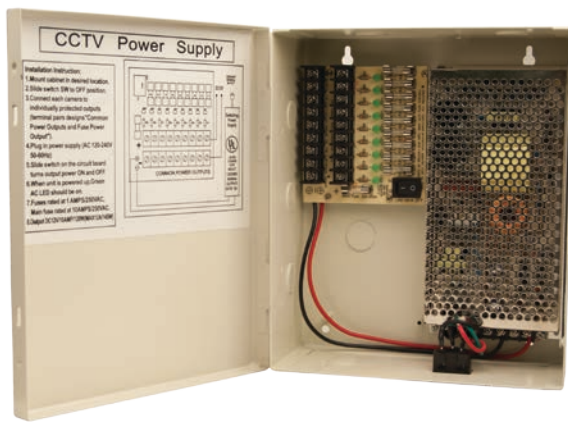

### 5011 Specifications

- Input:** 120VAC @ 60Hz, 2.5A
- Output:** 12VDC @ 1,333mA x 9
- Dimensions:** 10"W x 8.5H x 3.7"D
- Operating Temperature:** 14°F - 86°F
- UL Listing:** (E3086063JCK)
- Input Fuse Rating:** 10A 250V
- Output Fuse Rating:** 1A 250V

### 5012 Specifications

- Input:** 120VAC @ 60Hz, 2.5A
- Output:** 12VDC @ 665mA x 18
- Dimensions:** 10"W x 8.5H x 3.7"D
- Operating Temperature:** 14°F - 86°F
- UL Listing:** (E3086063JCK)
- Input Fuse Rating:** 10A 250V
- Output Fuse Rating:** 1A 250V

\*Specifications subject to change.  
iOS and Android are registered trademarks of their respective companies.



Surveillance Systems



Structured Wiring



Intercom & Telephone  
Entry Systems



IR Remote Control  
Distribution



Audio & Video  
Distribution