



# CHANNEL VISION™ *Central*


◆ Structured Wiring Solutions ◆

## C-0410 Surge Protection Module

The C-0410 protects against phone line transients caused by lightning, power cross, and other conditions. Through the use of thermal fuses, the phone line is disconnected during a power surge. Once that surge is over and the unit cools down, the phone line will be reconnected. The C-0410 exceeds the 1.5kv line protection required by FCC regulations and meets the higher standards of Bellcore.

### **Features:**

- 4 lines in, 4 lines out
- Compatible with all Loop Start
- Consumer Premise equipment
- Complies with UL 1459 and UL 1950 power cross requirements
- Passes FCC Part 68 Type A and Type B lightning tests operationally
- Bellcore 1 compliant (GR-1089) (2500@500amps)  
\*Bellcore is a tougher spec aimed at the RBOC'S (Regional Bell Operating Centers)
- Provides un-balanced line over voltage and over current protection
- Automatically resets once surge condition has cleared restoring the phone line

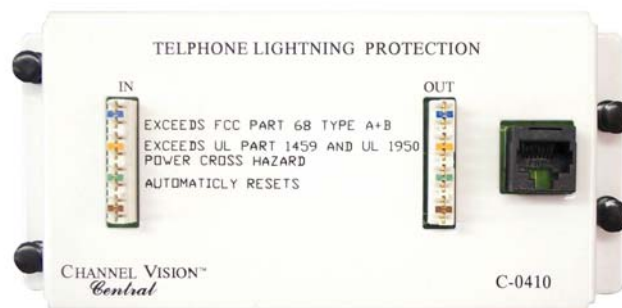

Dimensions: 6-3/8" (l) x 3" (h) x 1" (d)



**CHANNEL VISION™**  
234 FISCHER AVENUE • COSTA MESA, CA 92626  
(714) 424-6500 • (800) 840-0288 • (714) 424-6510 fax  
www.channelvision.com • email: sales@channelvision.com