




Balun for Video, Audio and Power

B-300

Channel Vision's Amplified Balun Kit for Audio, Video & PTZ Control, provides the necessary impedance transformation to transition from 75 ohm coax, to twisted pair cabling. It's a great way to deliver video, audio, and power from a security camera when you only have a CAT5 cable running to the camera location and no coax. The low cost, simplicity and availability of twisted pair cable makes the B-300 a convenient choice for both new construction and retrofit applications.

Features

- Sends video, audio and power over 1,000 ft. of CAT5
- Includes both transmit and receiver units
- Compatible with Category 5, 5e and 6 wiring
- Small size allows for installation in crowded spaces

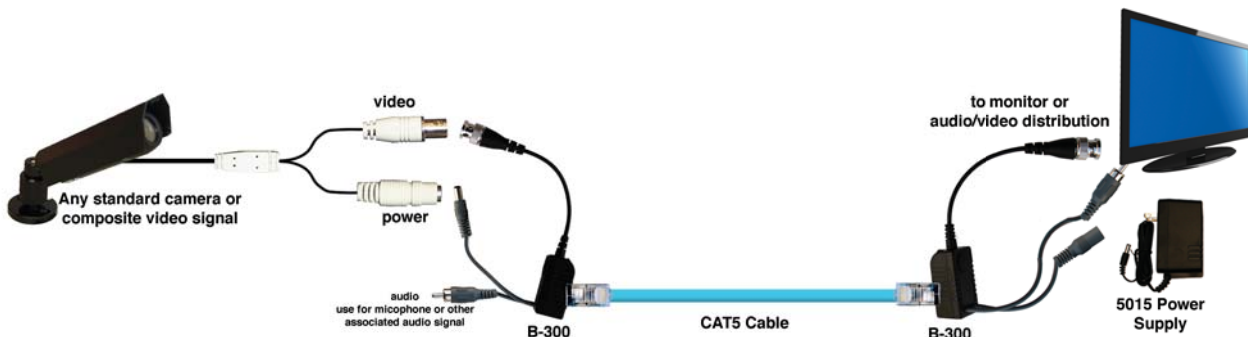

Specifications*

Video In/Out: BNC Male Connector
Video Format: RS170, NTSC, CCIR or SECAM
Video Attenuation: 0.5dB (typical)
Operation Frequency Range: 0 to 10MHz
Operating Temperature: -10° C to 70° C

Twisted Pair Connector: RJ-45 connector
Common Mode Rejection: 50dB
Transmission Distance: Max 1000 ft.
Wire Type: UTP Category 5, 5e or 6
Dimensions: 0.86" x 0.8" x 1.7" (excluding connectors)
 22mm x 21mm 4.3mm

*Specifications subject to change



Channel Vision Central
Structured Wiring



Channel Vision DVI
IR & Audio Equipment



ARIA™
Multi-Room Audio



Channel Vision Technology
Modulators, Cameras, Intercoms